

General information

PWS3420240319

The BLH NOBEL KOSD40 load cell is suitable to force measurement. The KOSD40 cell is easy to install and to maintain thanks to its cylindrical shape. The KOSD40 load cell is used for offshore platforms, cranes, tension measurement and level monitoring. The load cell BLH NOBEL KOSD40 is also available for extreme temperature from - 40 to + 100 °C.



Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

Weight Transmitter [UWT 6008](#)

Weight Transmitter [DAT 1400](#)

Weight Indicator [MCT 1302](#)

Tester 1008 [TESTER 1008](#)

Junction Box [CGS4-C](#)

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Technical specifications


PWS3420240319

Rated load RL:	10, 20, 50, 100, 200 kN
Combined error:	±0.5 % RO
Repeatability:	0.25 % RO
Safe overload:	100 % RL
Ultimate overload:	200 % RL
Safe sideload:	100 % RL
Ultimate sideload:	200 % RL
Material:	Stainless steel
Degree of protection:	IP67
Temperature range:	-40 ÷ +80 (+100 optional)°C
Temperature effect on zero balance:	±0.04 % RO/°C
Temperature effect on output:	±0.04 % of output/°C
Rated output RO:	±1 mV/V
Zero balance:	±5 % RO
Insulation resistance:	> 4 G Ohm
Input resistance:	350 ±5 Ohm
Output resistance:	350 ±5 Ohm
Recommended input:	10 Vdc/ac
Maximum supply voltage:	18 Vdc/ac
Tolerance of shunt calibration values:	±1 %

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

BLH Nobel load cell **KOSD40**

available with certification • EAC • ATEX • IECEx • SIL

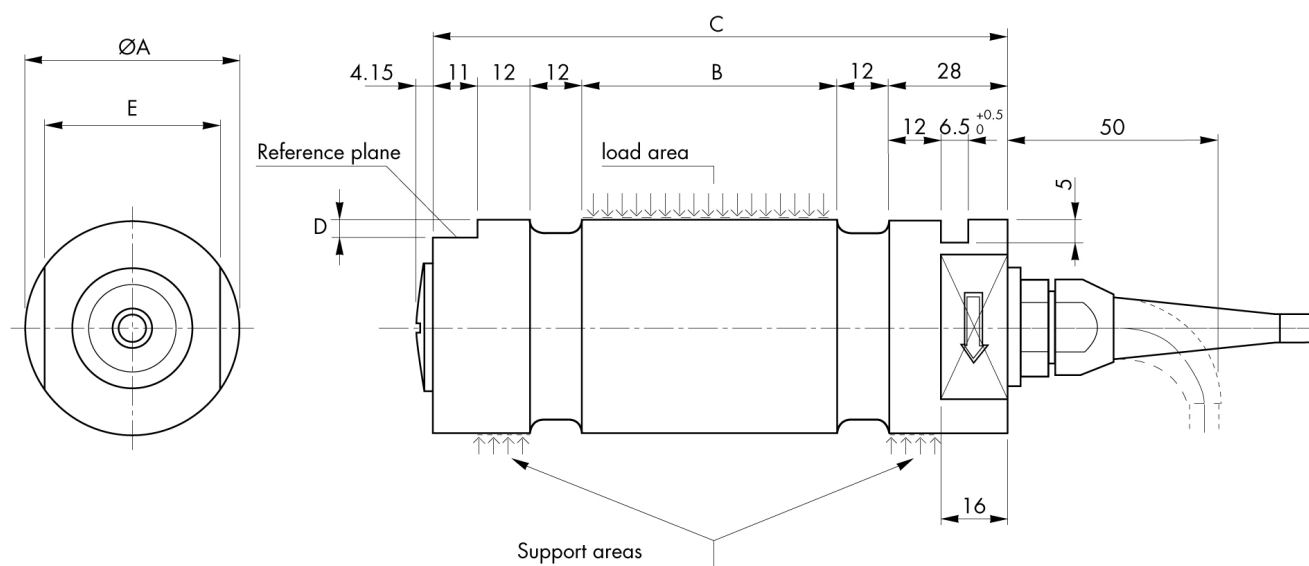

RANGE kN	ØA	B	C	D	E
10-20-50	40 f8	35	110	4	32
100	50 f8	60	135	5	40
200	70 f8	60	135	5	60

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).