

## General information

PWS20720240320

The weight transmitter DAT 400 Ethernet is sold exclusively by Pavone Systems and it guarantees high performance and reliability. The weighing tool DAT 400 Ethernet can be bought in combination with Tester 1008, which facilitates the upload and download functions for the programming. Configuration and calibration can be set up both from the front panel and from a PC via USB port. The product can be customized according to customers' needs. It has a peak hold function for dynamic measures and screw terminal blocks.



Software Innovation 2: [inovation\\_2\\_weighing\\_software.zip](#)

Technical Manual: [dat-400\\_en.pdf](#)

Technical Manual: [dat-400\\_analog\\_en.pdf](#)

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications




PWS20720240320

|   |  |
|---|--|
| <b>Measuring range:</b>                   | -0.5 ÷ +3.5 mV/V (-3.9 ÷ +3.9 mV/V optional)                           |
| <b>Input sensitivity:</b>                 | 0.02 µV/count  |
| <b>Full scale non-Linearity:</b>          | <0.01%   |
| <b>Gain drift:</b>                        | < 0.001% FS/°C   |
| <b>Display:</b>                           | 6 digit, red LED (7 segments), h 14 mm                                 |
| <b>A/D Converter:</b>                     | 24 bit   |
| <b>Internal Resolution:</b>               | > 16.000.000 points  |
| <b>Transducer input voltage:</b>          | 5 V (max 6 load cells 350 Ohm)   |
| <b>Visible resolution (in divisions):</b> | 60000  |
| <b>Divisions value (adjustable):</b>      | x1, x2, x5   |
| <b>Decimal figures range:</b>             | 0 ÷ 3  |
| <b>Temperature range:</b>                 | -10 ÷ +50°C (max umidity 85% without condensation)                     |
| <b>Storage temperature:</b>               | -20 ÷ +70 °C   |
| <b>Filter:</b>                            | 0.1 ÷ 25 Hz  |
| <b>Logic output:</b>                      | 2 Solid-state relays, (maximum load 24 Vdc / 100 mA each)              |
| <b>Logic input:</b>                       | 2 optoisolated 24 Vcc PNP (External voltage)                           |
| <b>Serial port:</b>                       | USB, RS232C with ASCII or Modbus RTU protocols                         |
| <b>Power supply:</b>                      | 24 Vcc ±15% - power 5 W  |
| <b>Regulatory compliance:</b>             | EN61326-1, EN55011, EN55014 for EMC; EN61010-1 for electrical security |
| <b>Fieldbus:</b>                          | Ethernet 10/100 with protocols TCP, MODUBUS/TCP, IP                    |
| <b>Dimensions and weight:</b>             | 106 x 90 x 58 mm (L x H x P); 250 g                                    |
| <b>Baud rate:</b>                         | 2400, 9600, 19200, 38400, 115200 adjustable (for RS232)                |
| <b>Transmission distance:</b>             | 15m (RS232C)   |

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

# Weight Transmitter **DAT 400 Ethernet**

available with certification • UL • GOST • EAC • OIML

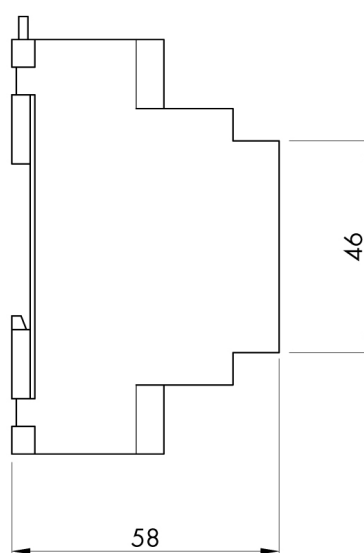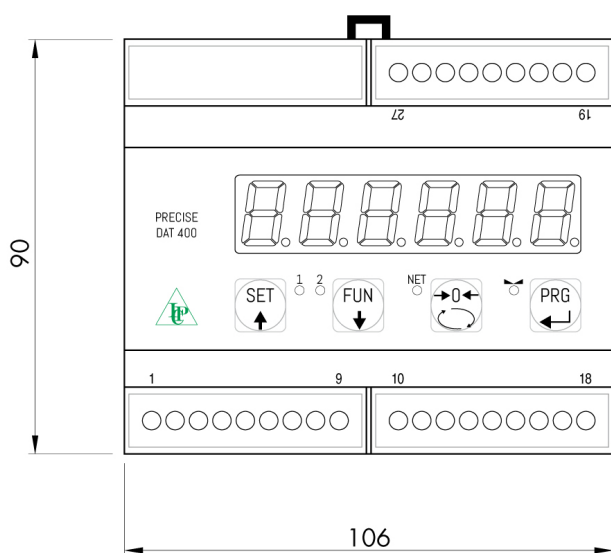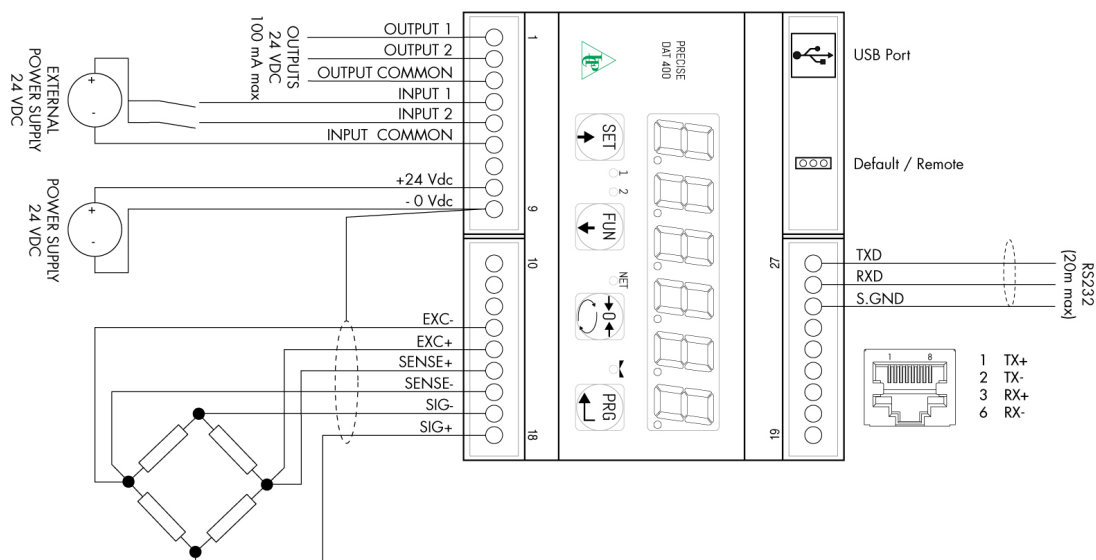

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).