

## General information

PWS4820240320

The bending beam load cell BBR is made of stainless steel, is completely welded and has a thermal seal. The cell BBR has been designed for weighing tanks, hoppers, belts, platforms, single-cell systems, suspended loads and automatic packaging machines and is supplied with a shielded cable 3 meters long.



## Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

**Weight Transmitter** [DAT 1400](#)

**Weight Indicator** [MCT 1302](#)

**Mounting kits** [MKX ®](#)

**Mounting kits** [MH MOUNTING KIT](#)

**Tester 1008** [TESTER 1008](#)

**Junction Box** [CGS4-C](#)

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications





PWS4820240320

<b>Rated load (RL):</b>	5, 10, 20, 30, 50, 75, 100, 150, 200, 250, 300, 500 Kg
<b>Combined error:</b>	< $\pm 0.017$ % RO
<b>Repeatability:</b>	< $\pm 0.015$ % RO
<b>Creep (20 minutes):</b>	$\pm 0.016$ % RO
<b>Safe overload:</b>	150 % RL
<b>Ultimate overload:</b>	200 % RL
<b>Accuracy class:</b>	3000 OIML
<b>Deflection:</b>	0.2 ÷ 0.4 mm
<b>Compensated Temperature:</b>	-10 ÷ +40°C
<b>Temperature range:</b>	-20 ÷ +50°C
<b>Temperature effect on zero balance:</b>	< $\pm 0.01$ % RO/5°K
<b>Temperature effect on output:</b>	< $\pm 0.006$ % RO/5°K
<b>Rated output RO:</b>	2 mV/V $\pm 0.1$ %
<b>Zero balance:</b>	< $\pm 2$ % RO
<b>Insulation resistance:</b>	> 5000 M Ohm
<b>Input resistance:</b>	400 $\pm 20$ Ohm
<b>Output resistance:</b>	400 $\pm 20$ Ohm
<b>Recommended input:</b>	5 ÷ 15 Vdc/ac
<b>Degree of protection:</b>	IP68 - IP69K

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).


# Bending beam load cell **BBR**

available with certification • EAC • ATEX • OIML

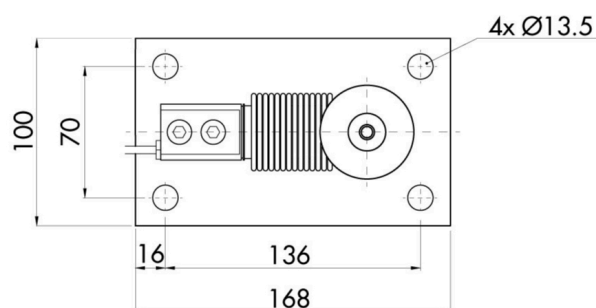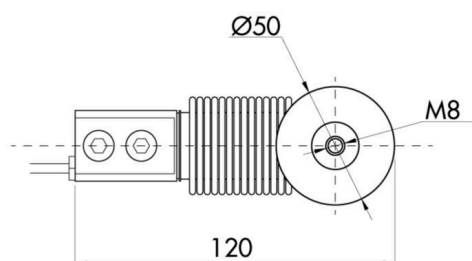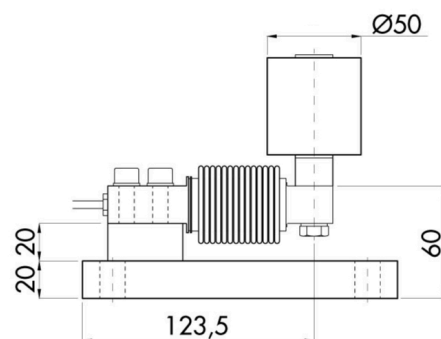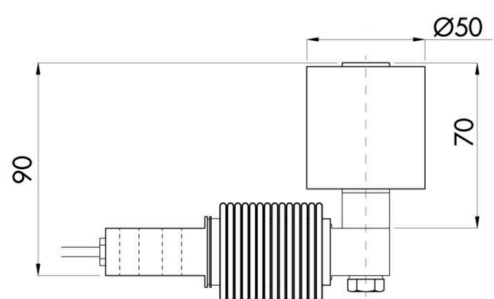

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

available with certification • EAC • ATEX • OIML

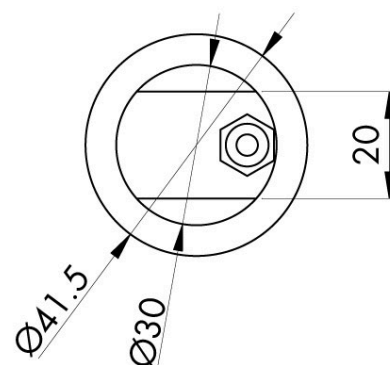

+Excitation	Green
-Excitation	Black
+Signal	Red
-Signal	White
Screen	Cable Shield